

## Lecture 15:

# Center-based Clustering

# K-means Clustering

---

---

- Partitional clustering approach
- Each cluster is associated with a **centroid** (center point)
- Each point is assigned to the cluster with the closest centroid
- Number of clusters,  $K$ , must be specified
- The basic algorithm is very simple

- 
- 1: Select  $K$  points as the initial centroids.
  - 2: **repeat**
  - 3:   Form  $K$  clusters by assigning all points to the closest centroid.
  - 4:   Recompute the centroid of each cluster.
  - 5: **until** The centroids don't change
-

# K-means Clustering – Details

---

- Initial centroids are often chosen randomly.
  - Clusters produced vary from one run to another.
- The centroid is (typically) the mean of the points in the cluster.
- ‘Closeness’ is measured by Euclidean distance, cosine similarity, correlation, etc.
- K-means will converge for common similarity measures mentioned above.
- Most of the convergence happens in the first few iterations.
  - Often the stopping condition is changed to ‘Until relatively few points change clusters’
- Complexity is  $O(n * K * I * d)$ 
  - $n$  = number of points,  $K$  = number of clusters,  
 $I$  = number of iterations,  $d$  = number of attributes




# Evaluating K-means Clusters

- Most common measure is Sum of Squared Error (SSE)
  - For each point, the error is the distance to the nearest cluster
  - To get SSE, we square these errors and sum them.


$$SSE = \sum_{i=1}^K \sum_{x \in C_i} \sum_{j=1}^n (m_j^i - x_j)^2$$

- $x$ : a data point in cluster  $C_i$ ,  $x_j$  is the  $j$ th attribute of  $x$ , and  $m_j^i$  is the  $j$ th attribute of the representative point for cluster  $C_i$ 
  - ◆ can show that  $m_j^i$  corresponds to the center of the cluster
- Given two clusters, we can choose the one with the smallest error
- One easy way to reduce SSE is to increase  $K$ , the number of clusters
  - ◆ A good clustering with smaller  $K$  can have a lower SSE than a poor clustering with higher  $K$


# Two different K-means Clusterings

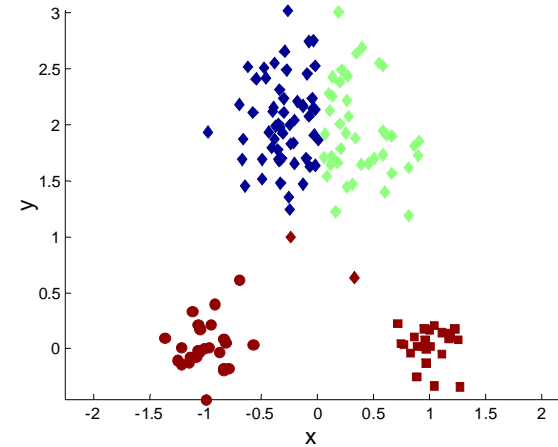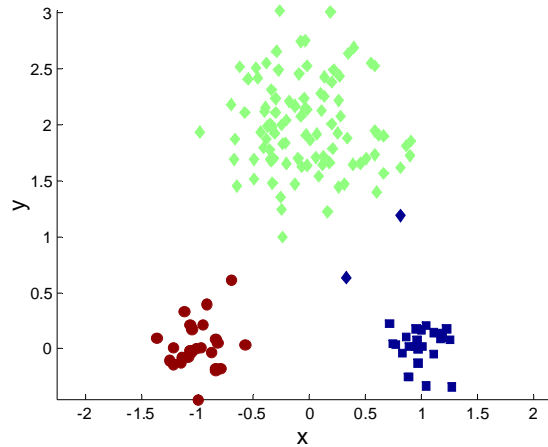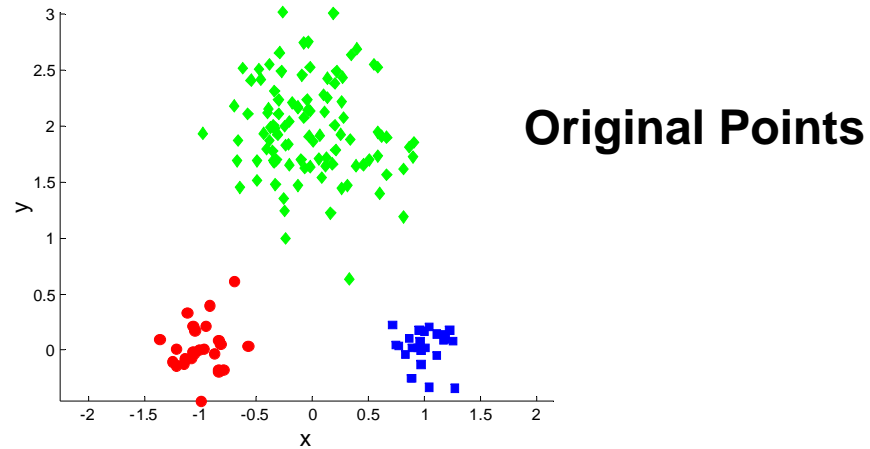


# Importance of Choosing Initial Centroids

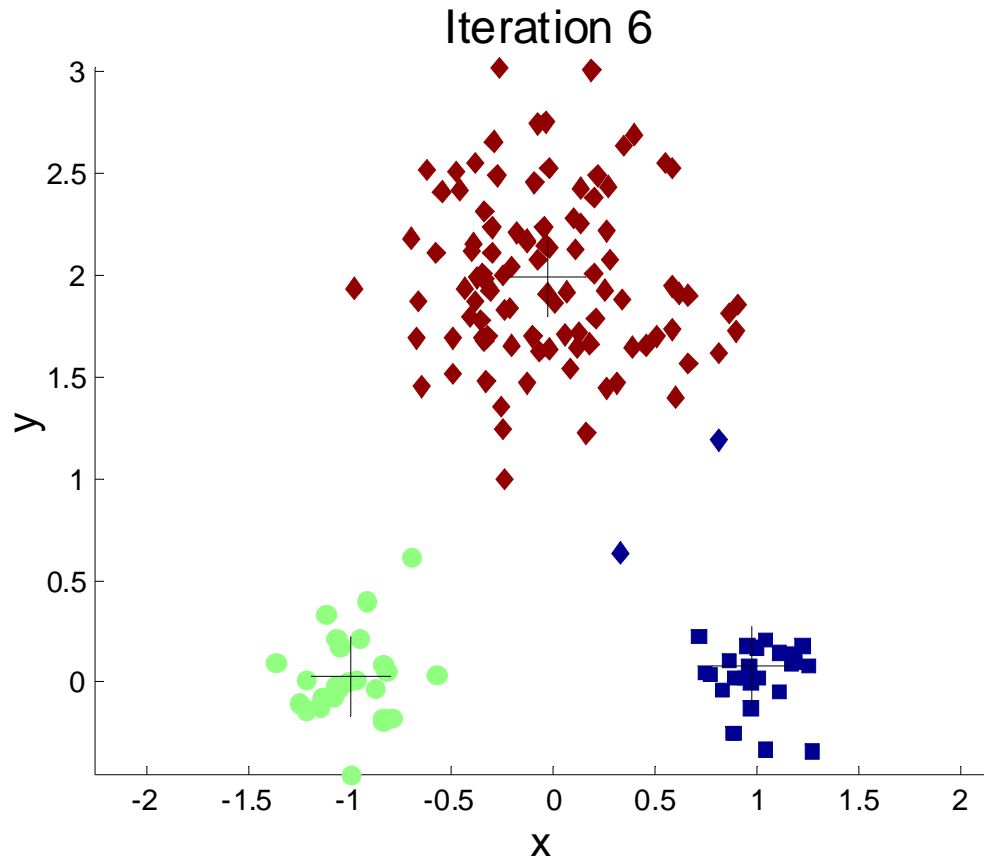

# Importance of Choosing Initial Centroids





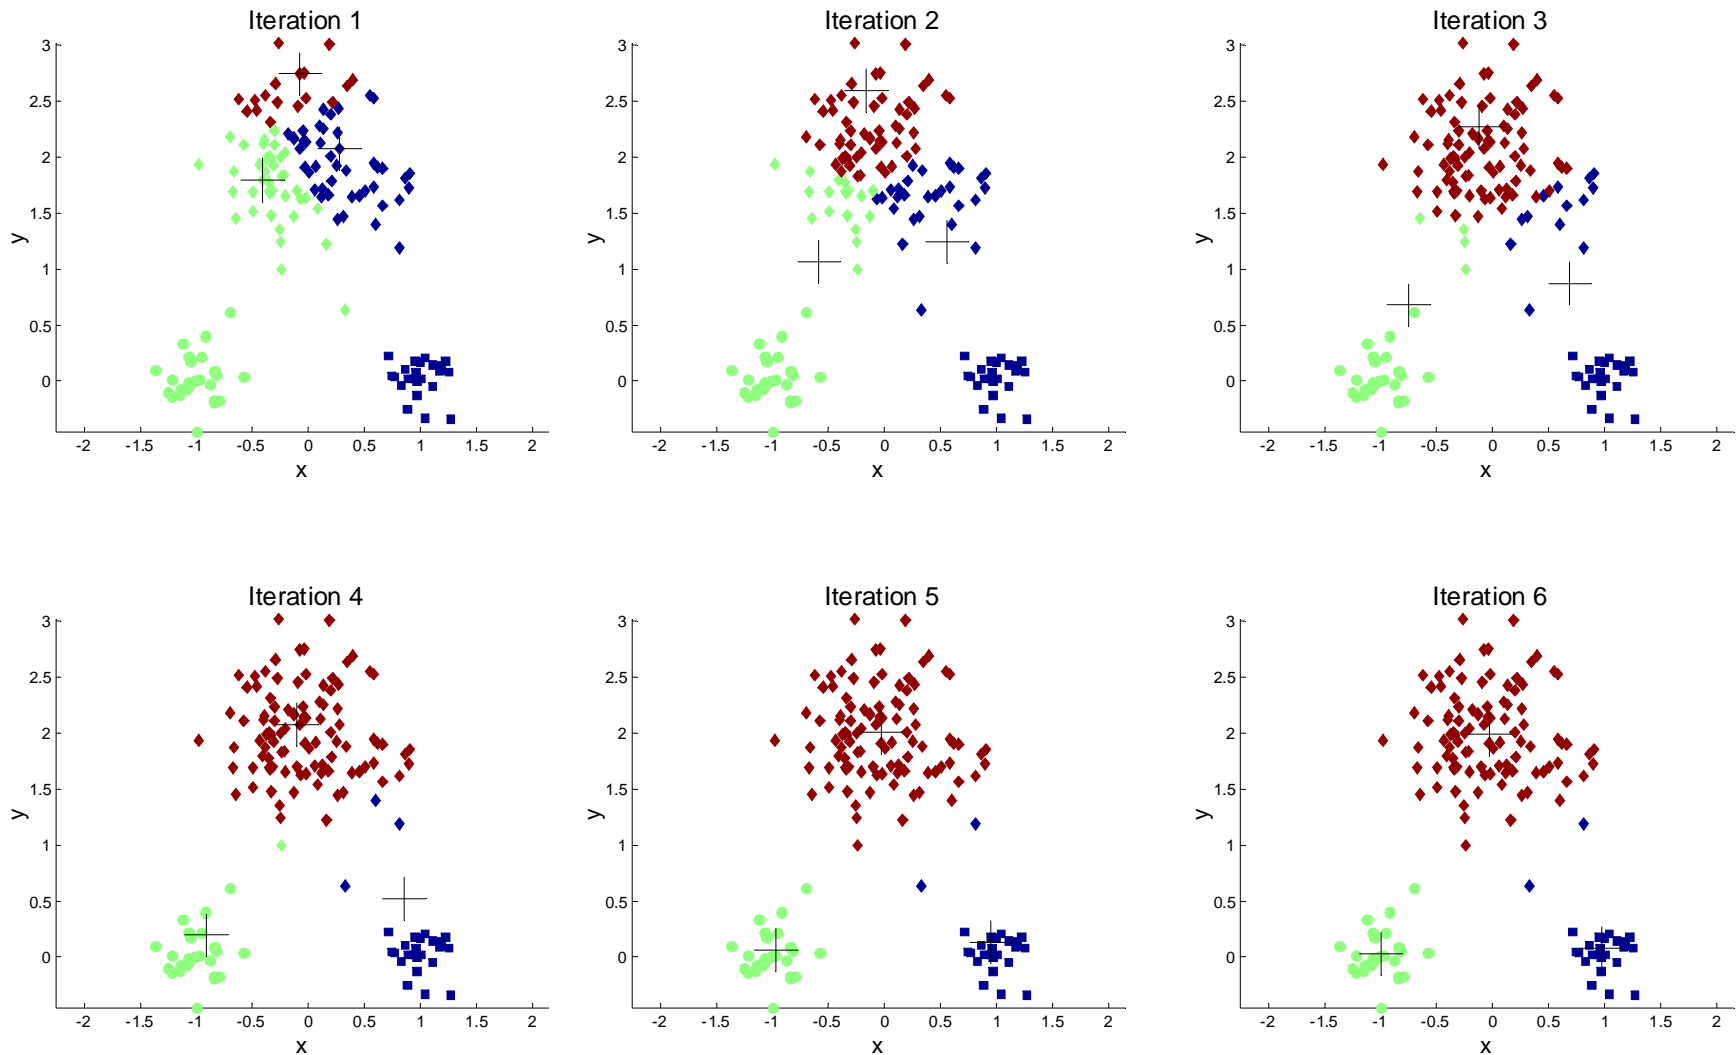


# Importance of Choosing Initial Centroids ...

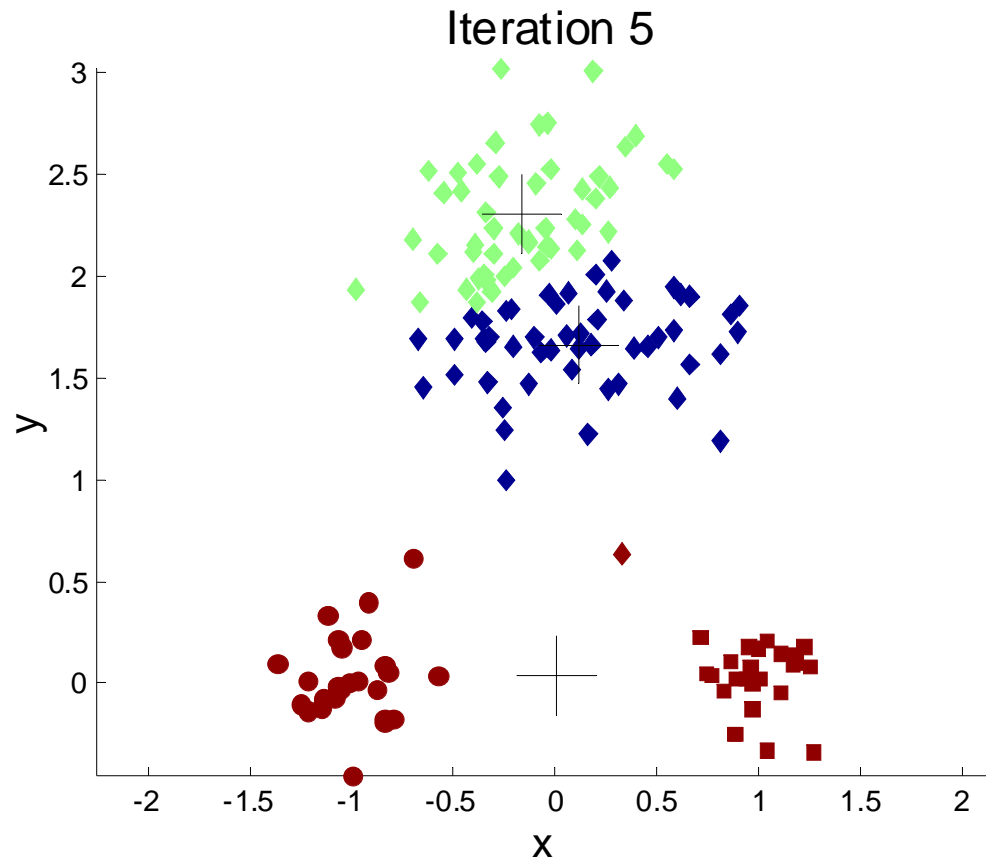



# Importance of Choosing Initial Centroids ...

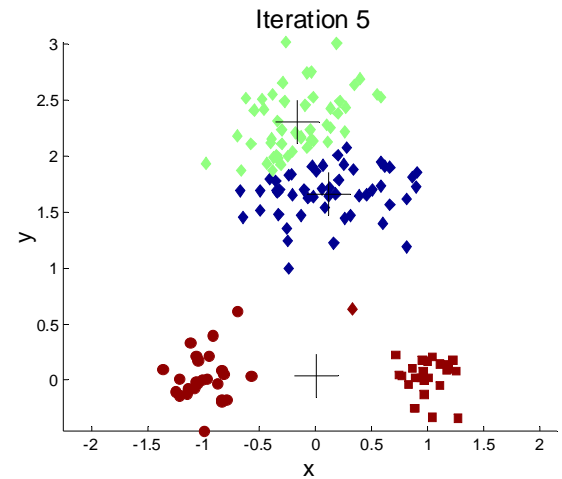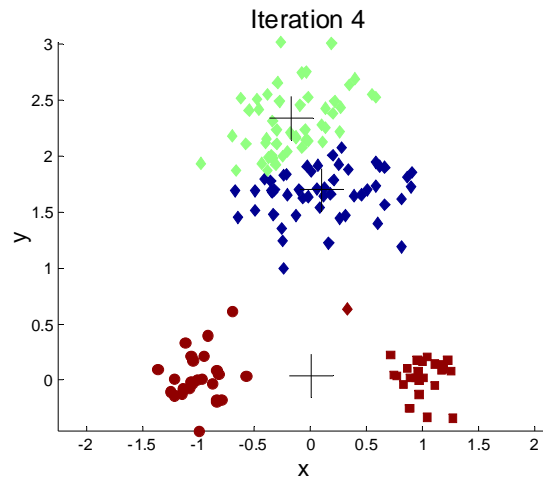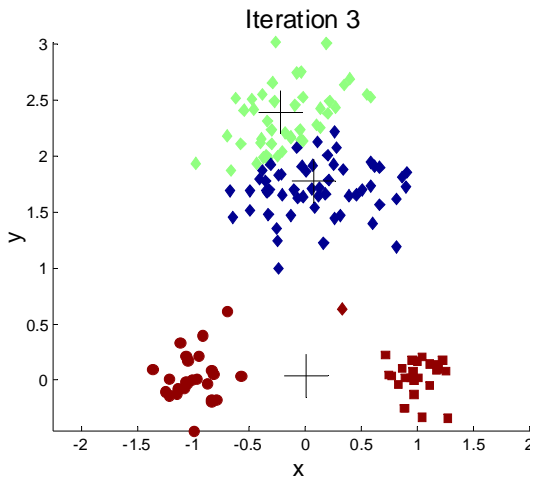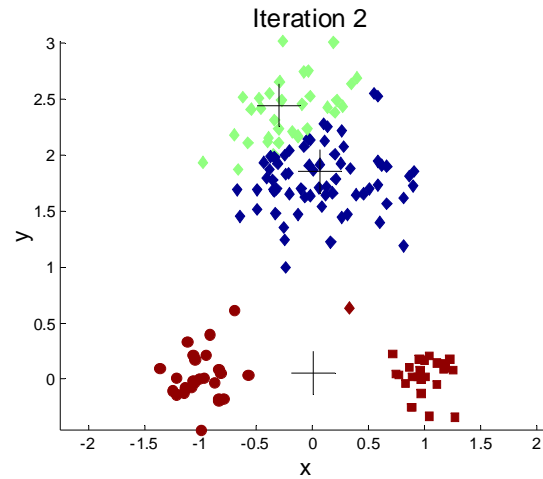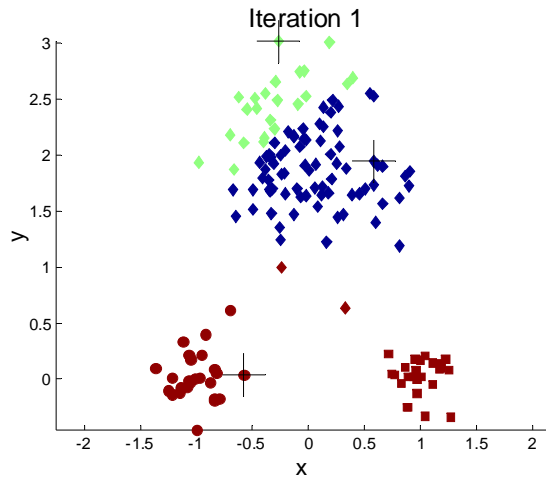

# Problems with Selecting Initial Points


- If there are  $K$  'real' clusters then the chance of selecting one centroid from each cluster is small.
  - Chance is relatively small when  $K$  is large
  - If clusters are the same size,  $n$ , then

$$P = \frac{\text{number of ways to select one centroid from each cluster}}{\text{number of ways to select } K \text{ centroids}} = \frac{K!n^K}{(Kn)^K} = \frac{K!}{K^K}$$

- For example, if  $K = 10$ , then probability =  $10!/10^{10} = 0.00036$
- Sometimes the initial centroids will readjust themselves in 'right' way, and sometimes they don't
- Consider an example of five pairs of clusters





# 10 Clusters Example

Iteration 4

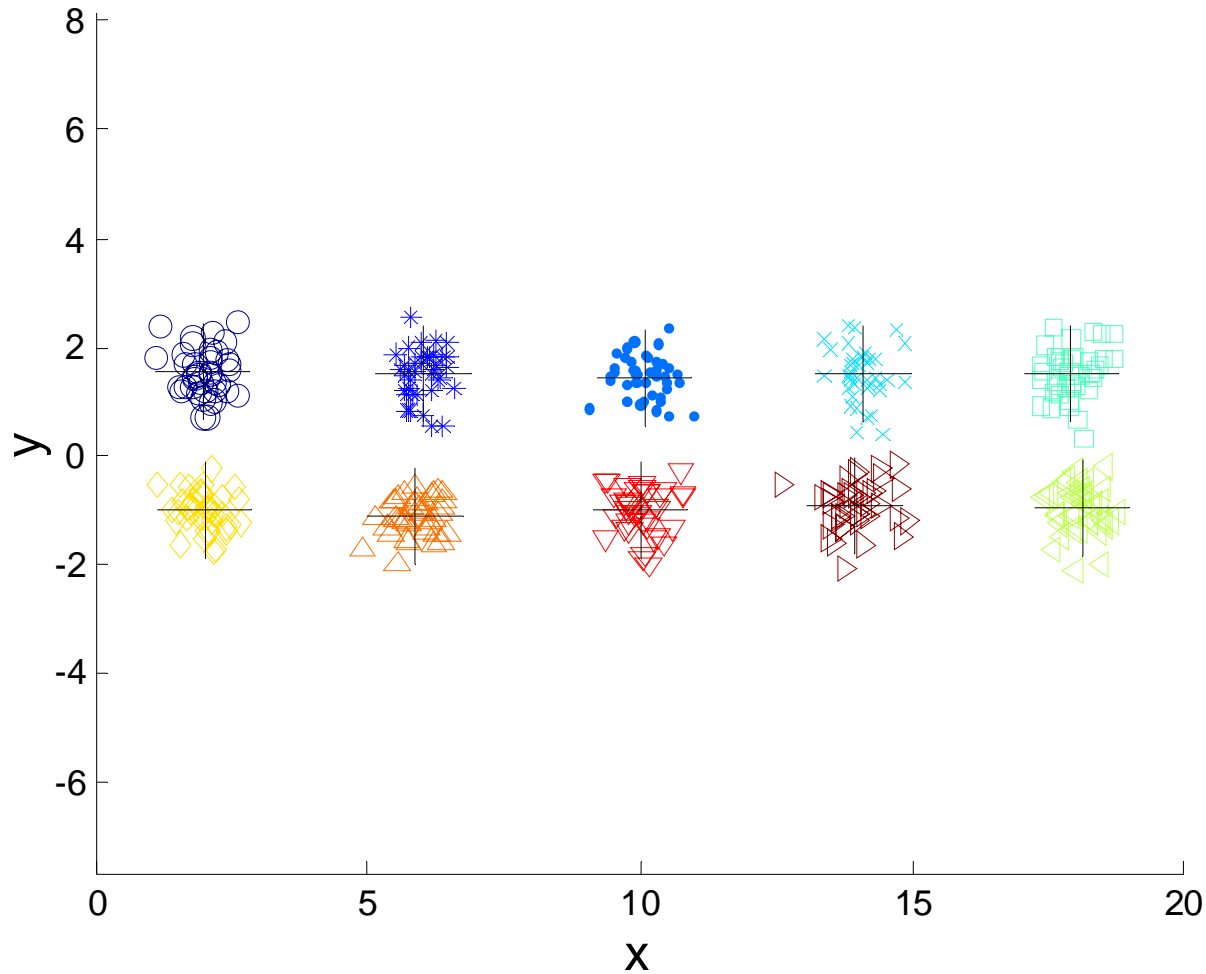

**Starting with two initial centroids in one cluster of each pair of clusters**


# 10 Clusters Example

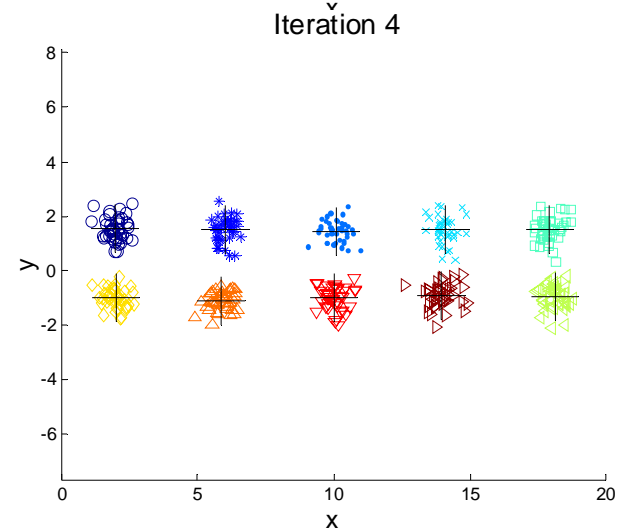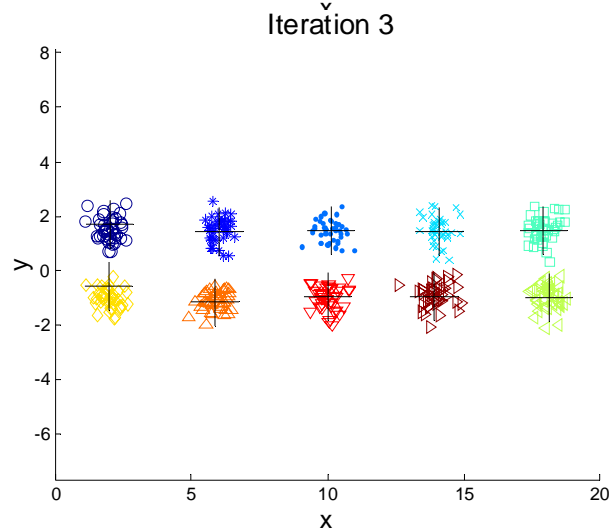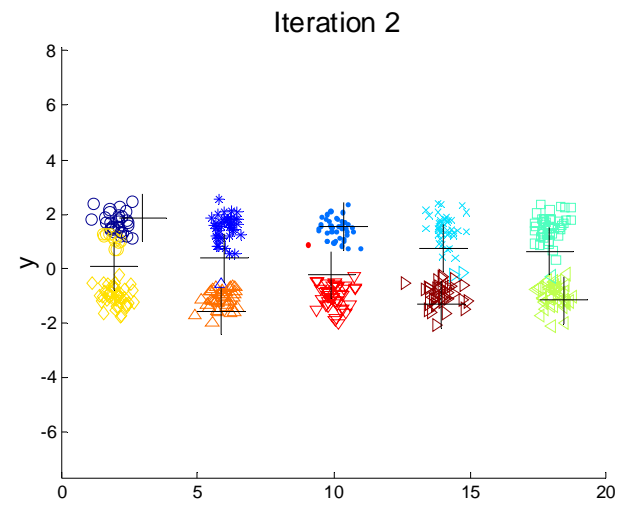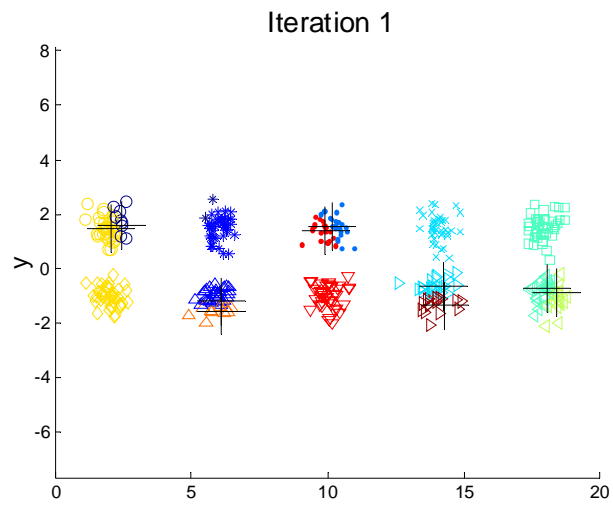

**Starting with two initial centroids in one cluster of each pair of clusters**





# 10 Clusters Example

Iteration 4

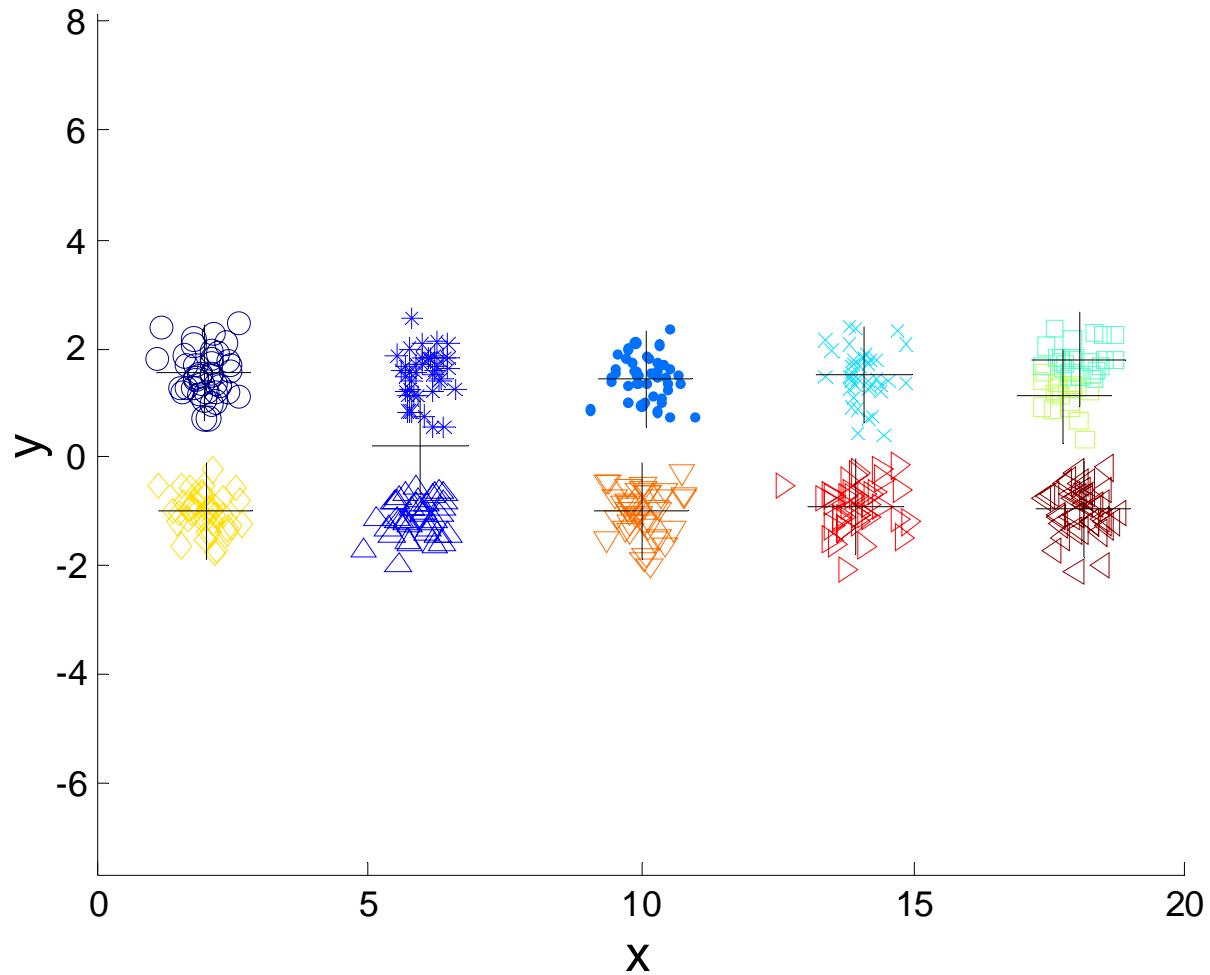

Starting with some pairs of clusters having three initial centroids, while other have only one.

# 10 Clusters Example

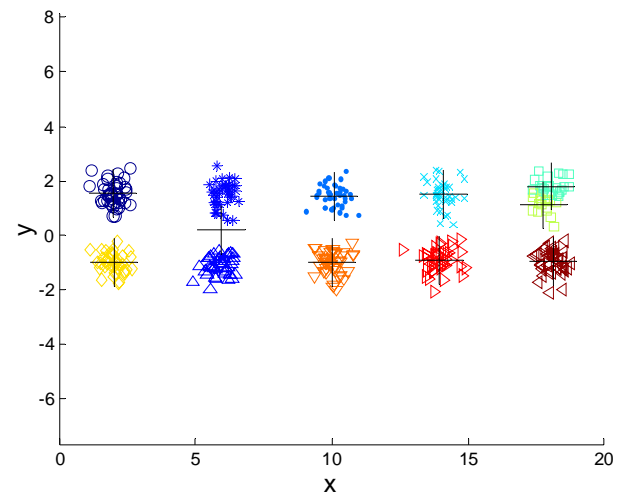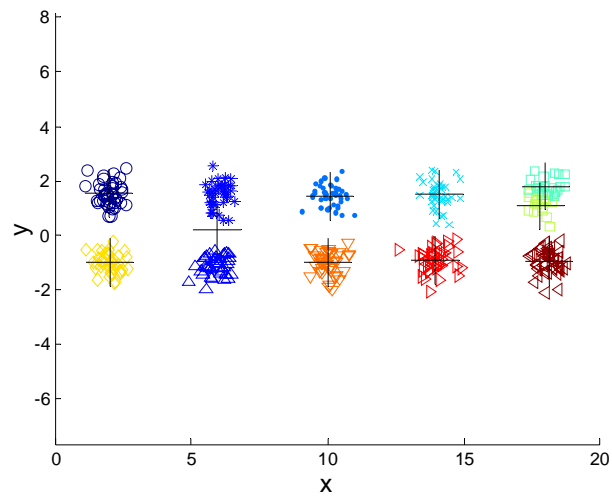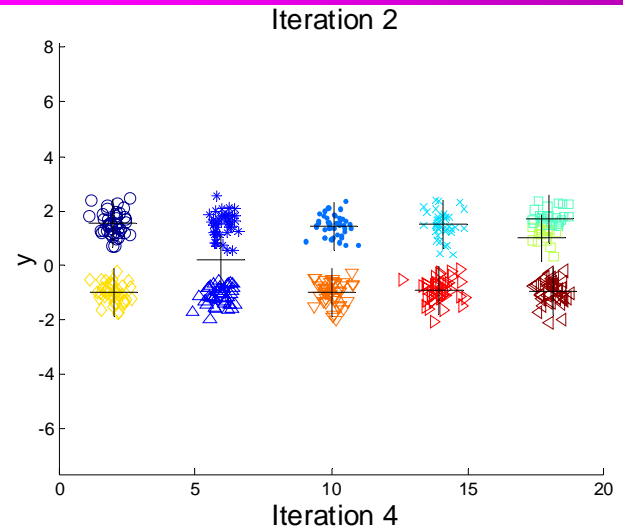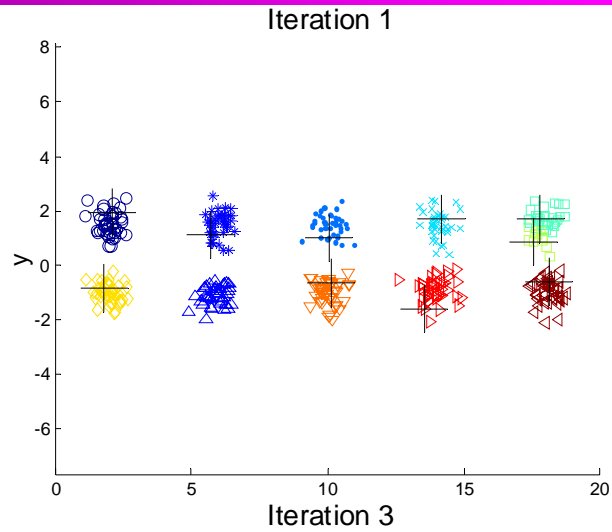

**Starting with some pairs of clusters having three initial centroids, while other have only one.**

# Solutions to Initial Centroids Problem

---

- Multiple runs
  - Helps, but probability is not on your side
- Sample and use hierarchical clustering to determine initial centroids
- Select more than  $k$  initial centroids and then select among these initial centroids
  - Select most widely separated
- Postprocessing
- Bisecting K-means
  - Not as susceptible to initialization issues

# Updating Centers Incrementally

---

---

- In the basic K-means algorithm, centroids are updated after all points are assigned to a centroid
- An alternative is to update the centroids after each assignment (incremental approach)
  - Each assignment updates zero or two centroids
  - More expensive
  - Introduces an order dependency
  - Never get an empty cluster
  - Can use “weights” to change the impact



# Pre-processing and Post-processing

---


- Pre-processing
  - Normalize the data
  - Eliminate outliers
- Post-processing
  - Eliminate small clusters that may represent outliers
  - Split 'loose' clusters, i.e., clusters with relatively high SSE
  - Merge clusters that are 'close' and that have relatively low SSE
  - Can use these steps during the clustering process
    - ◆ ISODATA

# Limitations of K-means


---

- K-means has problems when clusters are of differing
  - Sizes
  - Densities
  - Non-globular shapes
- K-means has problems when the data contains outliers.

# Limitations of K-means: Differing Sizes

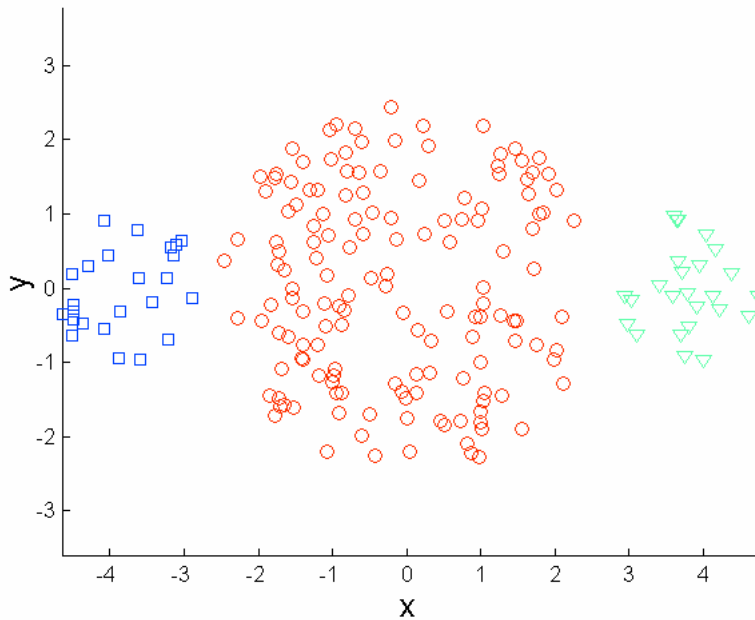


**Original Points**

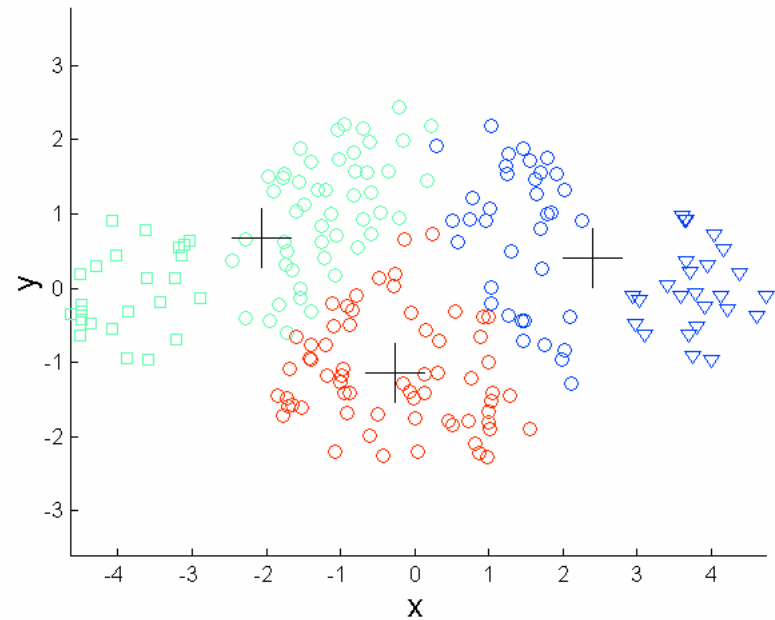


**K-means (3 Clusters)**

# Limitations of K-means: Differing Density

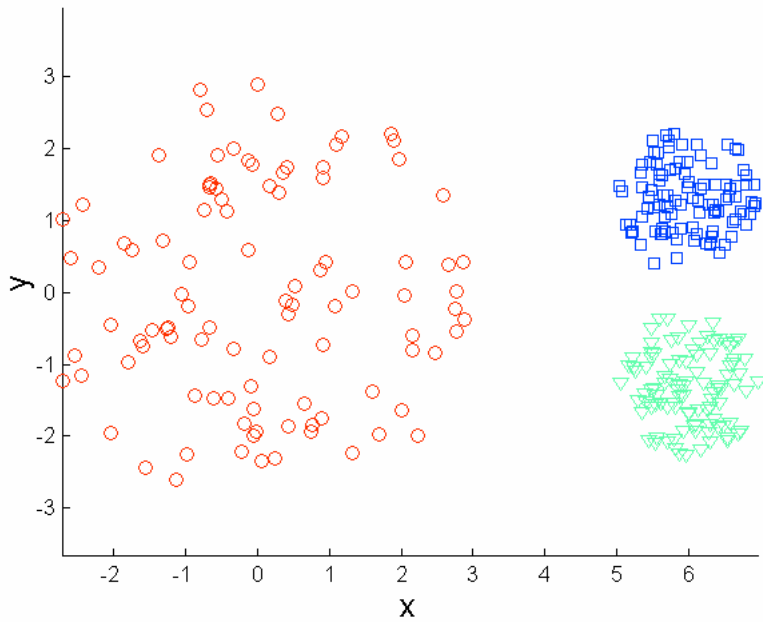


**Original Points**

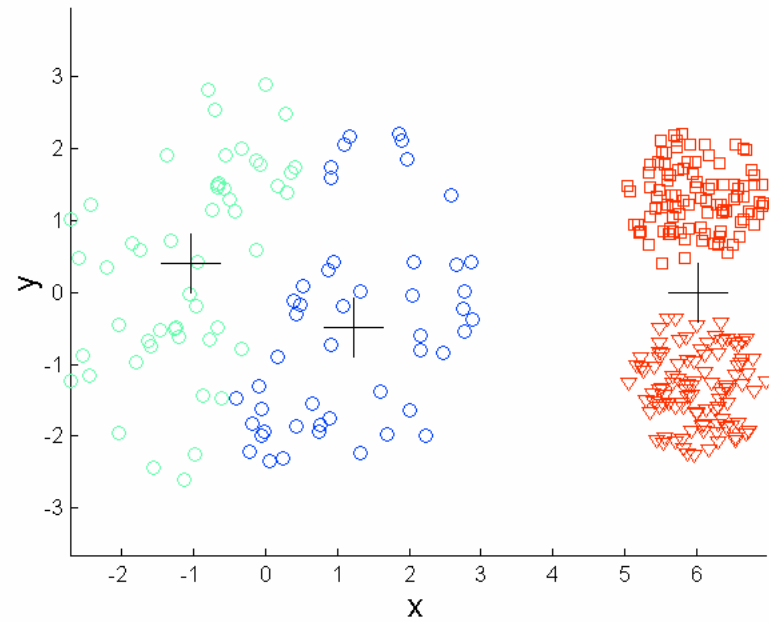


**K-means (3 Clusters)**

# Limitations of K-means: Non-globular Shapes

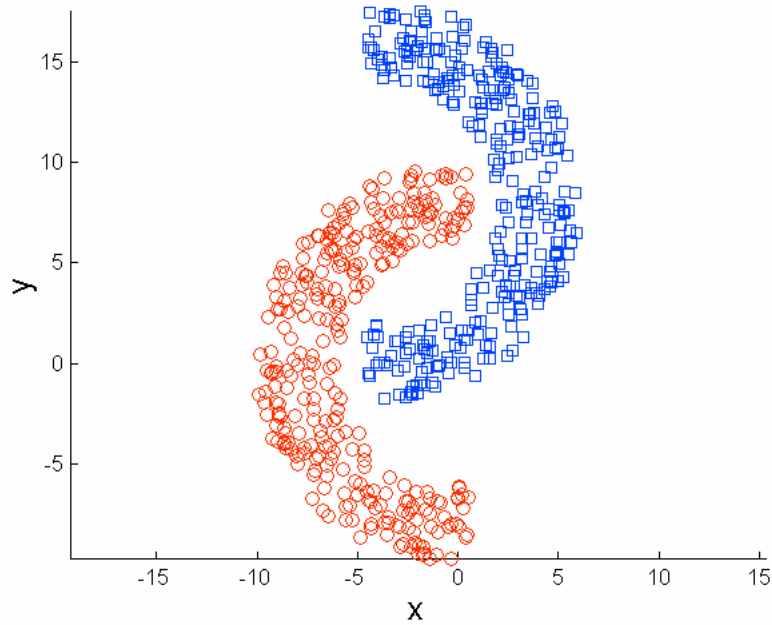


**Original Points**

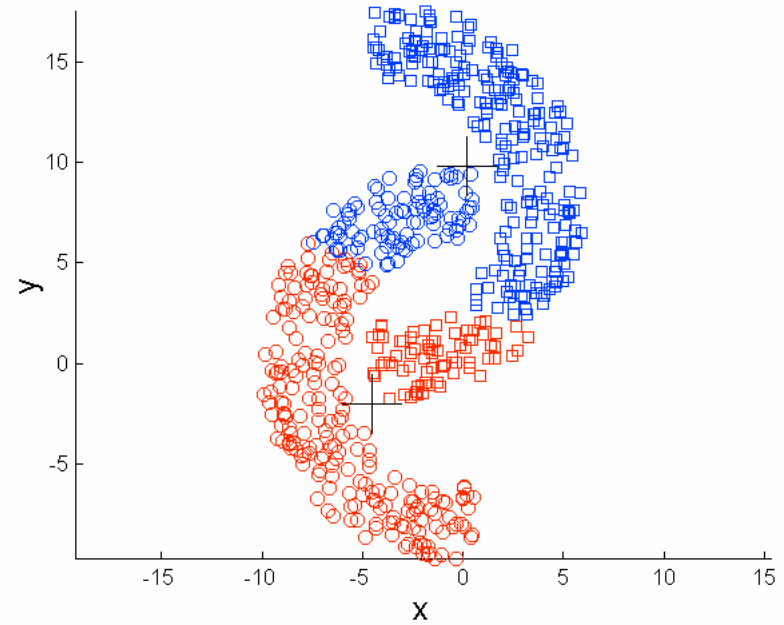


**K-means (2 Clusters)**

# Overcoming K-means Limitations

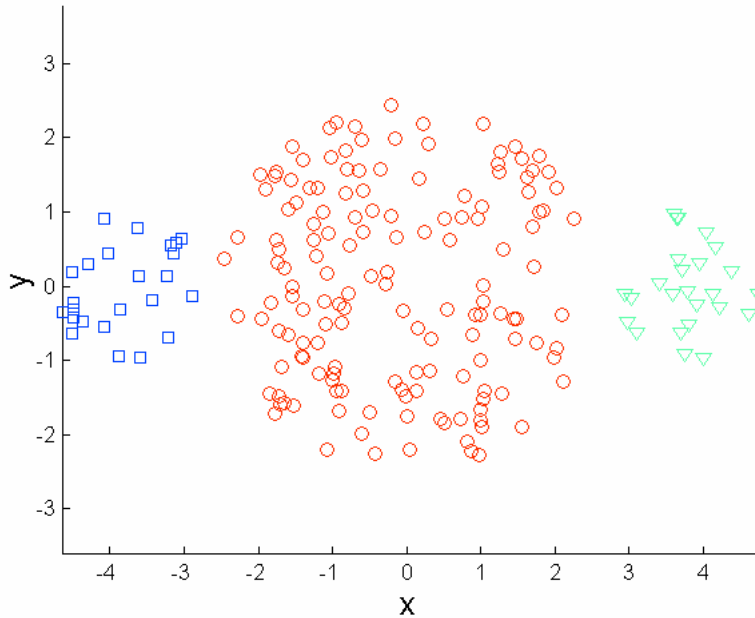

**Original Points**

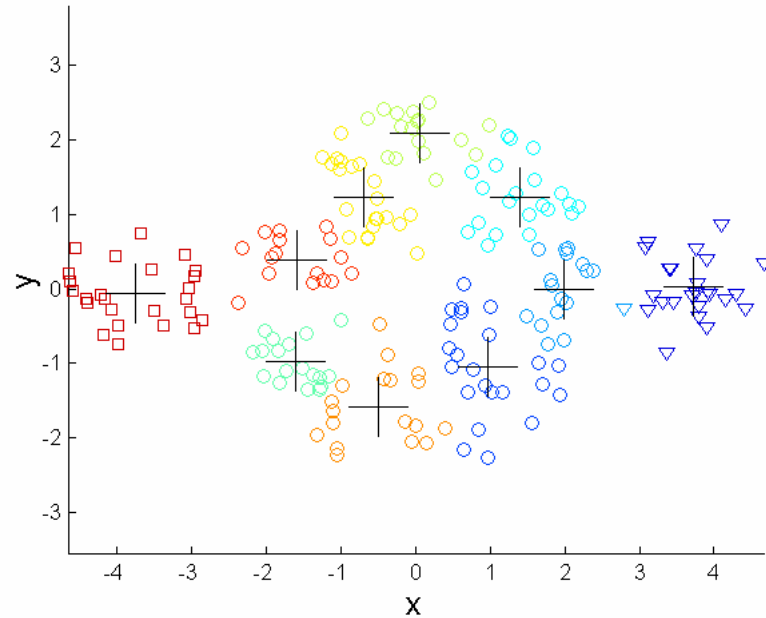


**K-means Clusters**


One solution is to use many clusters.

Find parts of clusters, but need to put together.

# Overcoming K-means Limitations

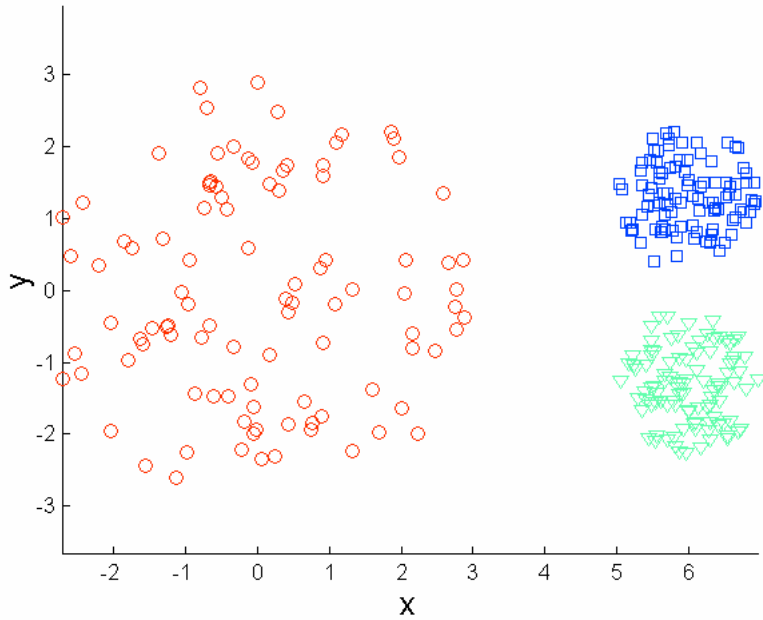


**Original Points**

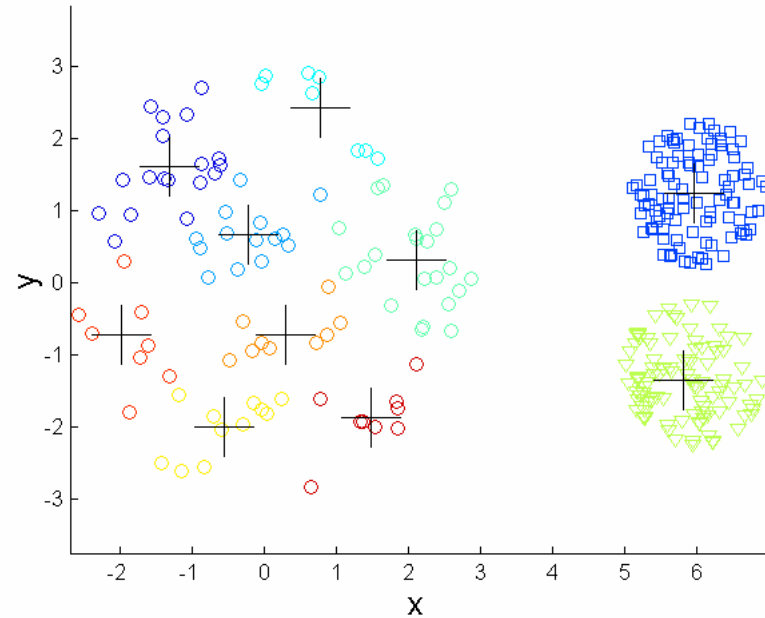


**K-means Clusters**

# Overcoming K-means Limitations

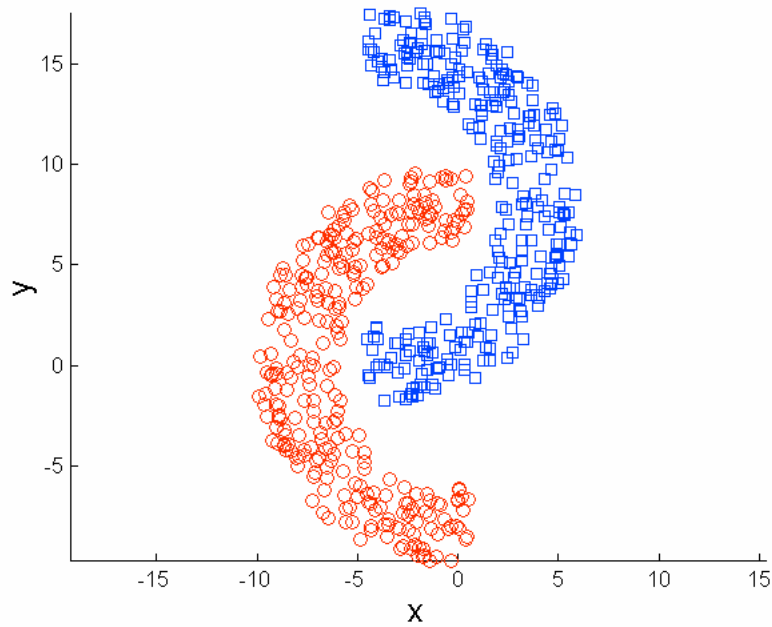

**Original Points**

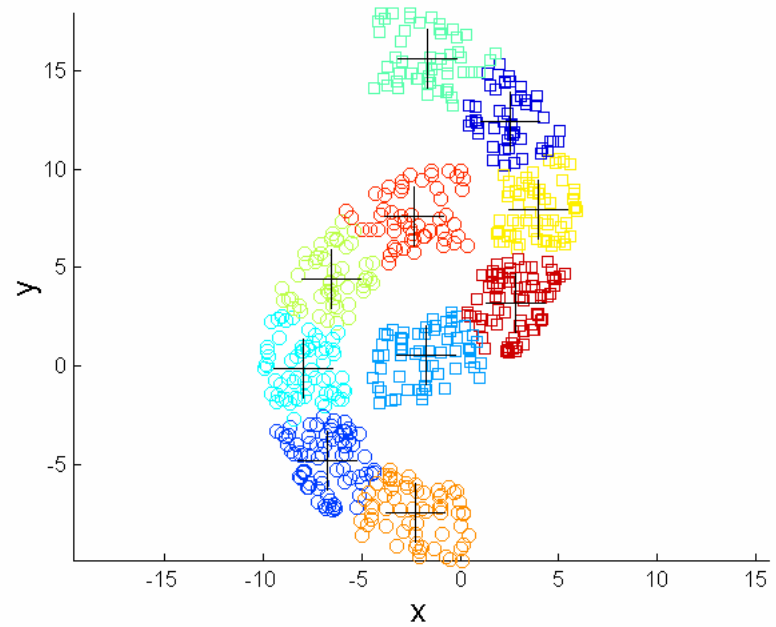

**K-means Clusters**